

MULTIFRESH® NEXT S



The propane blast chiller, completely customizable according to the needs of each professional choosing functions, type of performance, size of the display and the most useful features for its use.

The MultiFresh® Next blast chiller has up to 12 functions and 150 cycles selected for you by Irinox to preserve the product freshness longer.

Yield

	Eco Silent	Turbo
Fast cooling (+90°C/+3°C) - within 90 minutes	25 kg	up to+30%
Quick freezing (+90°C/-18°C) - within 240 minutes	25 kg	up to+30%

*Tests carried out in compliance with the Irinox procedure using 5-cm thick beef

Capacity

Number of trays: 8 x GN1/1 o 600x400 (H= 20 mm)

Number of trays: 5 x GN1/1 o 600x400 (H= 40 mm)

Number of trays: 4 x GN1/1 o 600x400 (H= 65 mm)

Standard construction details

- Door opening on the left with hinges on the left.
- Patented concealed hinges.
- Full height door with double bevelled side edges.
- Door opening up to 150°.
- Magnetic and slow closing of the door.
- Equipped with 5-chamber gasket designed for high and low temperatures.
- Core probe with 3 detection points with quick screw connector, anti-corrosion, watertight IP67.
- Magnetic flat surface (400x150 mm) to fix the core probe.
- Easy removal and cleaning of the condenser filter thanks to the tilting grill.
- Ergonomic and robust handle made of steel.
- AISI 304 stainless steel internal and external material.
- Built-in air condensation.
- R290 coolant gas.
- MultiRack®, the patented adjustable tray holder that improves air circulation inside the blast chiller.
- 5 pairs of guides included.
- 4 adjustable feet H 80-115 mm.
- WIFI module included for the HACCP report download.

Operation

2 available configurations:

Essential This is the basic configuration that includes the most known functions of the blast chiller: cooling, rapid freezing, cold storage and non-stop cooling/freezing; regardless of the product introduction temperature, it always guarantees excellent results in terms of quality and uniformity of temperature in the cell.

Pro The multi-function configuration including 12 functions. In addition to the cold functions present in the Essential configuration, you will find: hot preservation, defrosting, ready-to-serve, low-temperature cooking, chocolate melting, leavening, pasteurization and marination. It also includes Sanigen®, the ionisation system by Irinox.

- MultiFresh® Next's cooling cycles lower to +3°C the core temperature of the food, introduced at any temperature, even as soon as it is out of the oven, and quickly cross the band of maximum bacterial proliferation, the cause of their natural ageing.
- MultiFresh® Next's freezing cycles transform the water contained in food into microcrystals that preserve its structure and quality for longer.
- Automatic recognition of manual work mode (timed) or automatic mode (with probe).

2 available performance levels:

Eco Silent (available for PRO configuration): this performance guarantees a yield of 25 kg in cooling and freezing with a very low level of noise emissions, thanks to the use of both electronic 5-speed evaporator fans, which manage temperatures from -40°C to +85°C, and to the variable speed electronic condenser fans. Climate class 4 (30°C ambient);

Turbo: this performance increases the cooling and freezing capacity by up to 30%, thanks to the use of the 5-speed Electronic Evaporator Fans, which manage temperatures from -40°C to +85°C, 2 hermetic piston compressors and one-speed condenser fan. With climate class 5, it guarantees excellent performance up to 40°C ambient.

Interface

10" display with capacitive screen, colour LED bar to follow the progress of the running cycle even from a distance.

The display includes:

- Acoustic signal with adjustable intensity and fixed tone.
- Dashboard customizable with the cycles most used by the customer.
- Ability to customize and/or create new cycles.
- Library with all cycles made by the customer and by Irinox.

Connectivity

FreshCloud® is Irinox's IOT technology that allows you to control and interact with MultiFresh® Next at any time via an APP.

The functions included in the application are:

- Remote monitoring of the cycle in progress: connection status, cabinet temperature, core temperature, kitchen and machine name, cycle ID in progress, cycle and phase progress.
- Remote parameter modification (ventilation, cabinet temperature, core probe temperature, humidity level, phase duration).
- Machine status monitoring: connection status, machine ID, laboratory name, serial number, door status, Sanigen level.
- Push notification system.
- Usage statistics viewing.
- Haccp report download.
- Software update.
- Estimate of the energy consumption per cycle.


Optional

- Sanigen® (Irinox patented sanitising system, already included in the PRO configuration).
- Water condensation (available only for Turbo performance).
- WIFI printer with 1300 thermal label roll.
- Door opening on the right with hinges on the right.
- 4 wheels, 2 of which with brake.
- Adjustable lowered feet H = 60-80mm
- Pair of additional GN1/1 and 600x400 mm guides.
- Vacuum probe
- Special voltages on request.
- Ethernet board.
- Base support for stacking 2 MF Next S
- Base support for stacking an oven
- Reinforced support surface in 1.5 mm thick stainless steel to support an oven or another blast chiller.
- Unit sent without gas charge.

Product warranty

- For more details, please refer to the conditions of sale available at www.irinoxprofessional.com.

MULTIFRESH® NEXT S

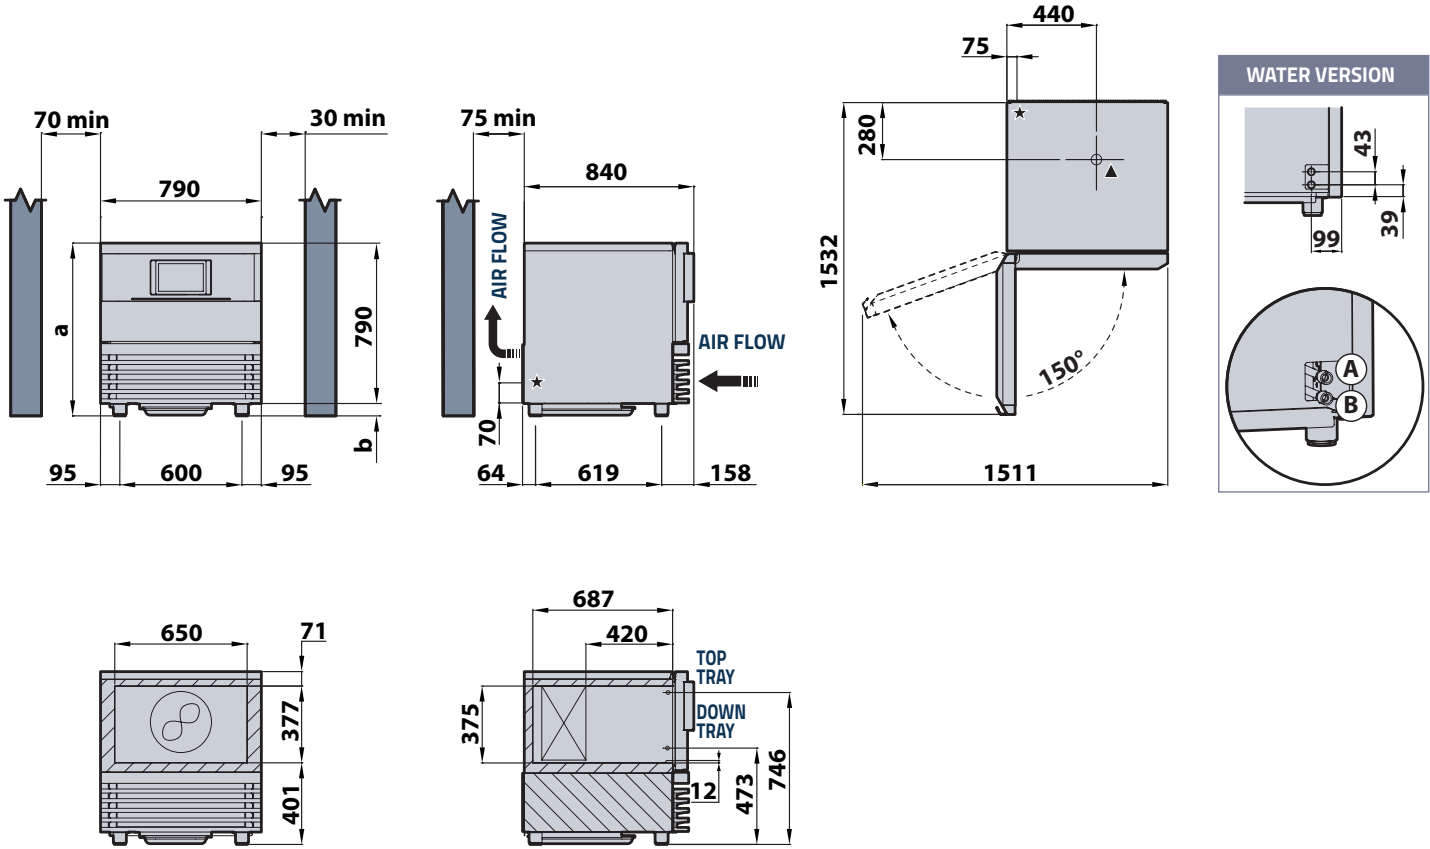

HEIGHT

		HEIGHT (a)	ADJUSTABLE FEET (b)
Standard feet	mm	870 - 905	80 ÷ 115
Lowered feet option	mm	850 - 870	60 ÷ 80
Castors option	mm	888	155

Measures in millimetres

- ★ Main power cable
- ▲ Water drainage corrugated hose Ø32mm
- Ⓐ Water outlet
- Ⓑ Water inlet

ENERGY CONSUMPTION ACCORDING TO EN 17032

Model		MF_NEXT_S (230V-1N+PE 50Hz)			
Type of product		Blast chiller / Blast freezer			
Performance		ECO SILENT	TURBO		
Yield per cycle	kg	15	25		
Energy consumption Blast chilling cycle (STRONG +3 °C)	kWh/kg	0,068	0,081		
Energy consumption Blast freezing cycle (STRONG -18 °C)	kWh/kg	0,192	0,24		
Blast chilling cycle from/to +65 °C / +10 °C	min	78	80		
Blast freezing cycle from/to +65 °C / -18 °C	min	251	267		

(*) Estimated consumption pending performance testing

Item No.:

Qty.:

Project:

COMMON TECHNICAL DATA

VERSION		AIR CONDENSATION	WATER CONDENSATION
LOW TEMPERATURE COOKING power	W	900	
LOW TEMPERATURE COOKING absorption	A	4.6	
Water inlet/outlet connections	NPTf	-	3/4"
Maximum water consumption (inlet temp. +30°C / outlet temp. +35°C)	l/h	-	864
MIN/MAX inlet water temperature (cooled water)	°C	-	+10 / +22 °C
MIN/MAX inlet water temperature (tower water)	°C	-	+23 / +35 °C
Coolant type	-	R290	
Nominal coolant quantity	kg	0.15	0.11
Dimensions (width x depth)	mm	790 x 840	
Cell internal dimensions (width x depth x height)	mm	650 x 420 x 375	
Cabinet weight	kg	105	105

VOLTAGE		220-240V 1ph+N+PE 50Hz			
		AIR CONDENSATION			WATER CONDENSATION
Performance		ECO SILENT	TURBO		
Power rating	W	890	1600		1580
Full load amps	A	4.8	7.7		7.5
Main power cable	mm ²	3G1.5	3G1.5		3G1.5
Cooling power (-10°C/+40°C)	W	1680	3360		3360
MAX Condensing power (-5°C/+45°C)	W	2670	5340		5340
Minimum air exchange	m ³ /h	1200	1200		-
Climate class	-	4 (30°C)	5 (40°C)		5 (40°C)

VOLTAGE		220-240V 1ph+N+PE 60Hz / 220-240 2ph+PE 60Hz			
		AIR CONDENSATION			WATER CONDENSATION
Performance		ECO SILENT	TURBO		
Power rating	W	1070	1960		1940
Full load amps	A	5.7	9.5		9.4
Main power cable	mm ²	3G1.5	3G1.5		3G1.5
Cooling power (-10°C/+40°C)	W	2016	4032		4032
MAX Condensing power (-5°C/+45°C)	W	3204	6408		6408
Minimum air exchange	m ³ /h	1320	1320		-
Climate class	-	4 (30°C)	4 (30°C)		5 (40°C)

VOLTAGE		230V 1ph+N+PE 60Hz / 230- 2ph+PE 60Hz			
		AIR CONDENSATION			
Performance		ECO SILENT	TURBO		
Power rating	W	1070	1960		
Full load amps	A	5.7	9.5		
Main power cable	mm ²	3G1.5	3G1.5		
Cooling power (-10°C/+40°C)	W	2016	4032		
MAX Condensing power (-5°C/+45°C)	W	3204	6408		
Minimum air exchange	m ³ /h	1320	1320		
Climate class	-	4 (30°C)	4 (30°C)		

INSTALLATION

The blast chiller must be installed following and complying with what is stated in the appropriate installation manual
The contents of the manual must be carefully followed to ensure correct operation and to protect the user's rights under the warranty.

Continuous product development may require changes to specifications without notice.

Irinox S.p.A.

Headquarter: Via Caduti nei Lager 1, 31015 Conegliano (TV) Italy
Productive Site: Via Mattei, 20 - 31029 - Vittorio Veneto (TV) Italy
Tel. +39 0438 2020 | irinox@irinox.com | www.irinoxprofessional.com

